


# CAR PARK DESIGN JET FANS AUO ARO 500

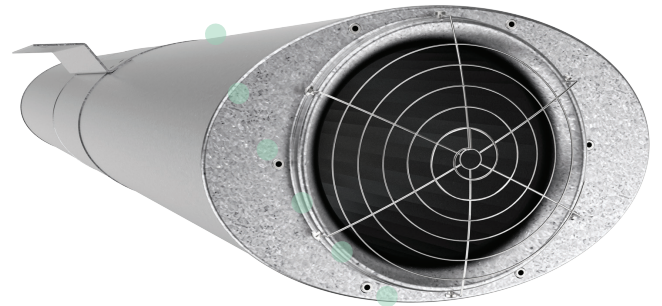

## PRODUCT

Oval design jet fans in a unidirectional (AUO) and fully reversible (ARO) version. This range of design jet fans excel in low noise levels. The installation height is 540 mm.

## APPLICATION

These compact and robust jet fans have been developed especially for the use in car parks. The jet fans have been designed for an optimal capacity, long life span and very reliable operation.

## CONSTRUCTION

The internal fan housing consists of a round fan casing with oval flanges. Oval silencers have been mounted on both sides on the fan casing. The fan has been constructed with guide vanes for an optimal efficiency. On the exterior the fan casing is acoustic isolated with an Aluzinc plating through which the fan housing makes up a whole with the silencers. On the unidirectional version a wire guard is mounted on the inlet side and a deflector on the discharge side. With deflectors the air stream flows in the desired direction. On the reversible version deflectors are mounted on both sides of the fan. As standard, the jet fans are equipped with mounting feet for direct mounting to the ceiling or wall.

## NOVAX IMPELLER

The impeller consists of a Novax hub in which special aluminium blades have been mounted at a pre-determined pitch angle. The impeller is coupled directly onto the motor shaft. All Novax fans are statically and dynamically balanced in accordance with VDI 2060 and ISO 21940-11:2016.

## MOTOR

The motor is two-speed 3x400V, 50Hz or 3x380V, 60Hz for direct start. Motor protection IP55 in accordance with IEC 34-5. Insulation class F or H depending on temperature protection.

## ELECTRIC ISOLATION

The jet fans have either electric isolating switches integrated in the fan casing or internal terminal boxes.

## SURFACE TREATMENT

As standard, all jet fans are delivered in an Aluzinc execution. A powder coating in any desired RAL color is available as an option. In the standard execution the jet fans meet the requirements for operation in unheated, low corrosive environments according to DS/EN ISO 12944-2, corrosion category C3.

## TEMPERATURE RESISTANCE

The standard operating temperature is from -20 until +40°C. Jet fans for hot smoke removal are certified according to the EN 12101 part 3 in the classes F200/F300/F400. Class F400 is only available for 50Hz.

The complete range of jet fans has been high temperature tested according to the table below:

Temp.	200°C	300°C	400°C
60 min		✓	
120 min	✓	✓	✓

High temperature test classes

# CAR PARK DESIGN JET FANS AUO ARO 500

JET FAN		AUO 500		ARO 500
Execution	-	Unidirectional		100% reversible
Measured thrust	N	27 / 105		28 / 111
Sound pressure level *, re. $2 \times 10^{-5}$ Pa	dB(A)	45 / 59		49 / 64
Electrical connection	V, Hz	3x400V, 50Hz	3x380V, 60Hz	3x400V, 50Hz 3x380V, 60Hz

MOTOR DATA (STANDARD TEMPERATURE)					
Installed motor power	kW	0,5 / 2,2	0,5 / 2,2	0,5 / 2,2	0,5 / 2,2
Nominal current	A	1,5 / 4,6	1,3 / 5,1	1,5 / 4,6	1,3 / 5,1


MOTOR DATA (F200/F300)					
Installed motor power	kW	0,5 / 2,2	0,5 / 2,2	0,5 / 2,2	0,5 / 2,2
Nominal current	A	1,5 / 4,6	1,3 / 5,1	1,5 / 4,6	1,3 / 5,1

MOTOR DATA (F400)					
Installed motor power	kW	0,5 / 2,2	-	0,5 / 2,2	-
Nominal current	A	1,5 / 4,6	-	1,5 / 4,6	-

TOTAL WEIGHT		
Total weight	kg	160

\* Sound pressure level at 3m from the jet fans under the free field conditions at an angle of 45°

\*\* Complete jet fan is certified according EN 12101 part 3

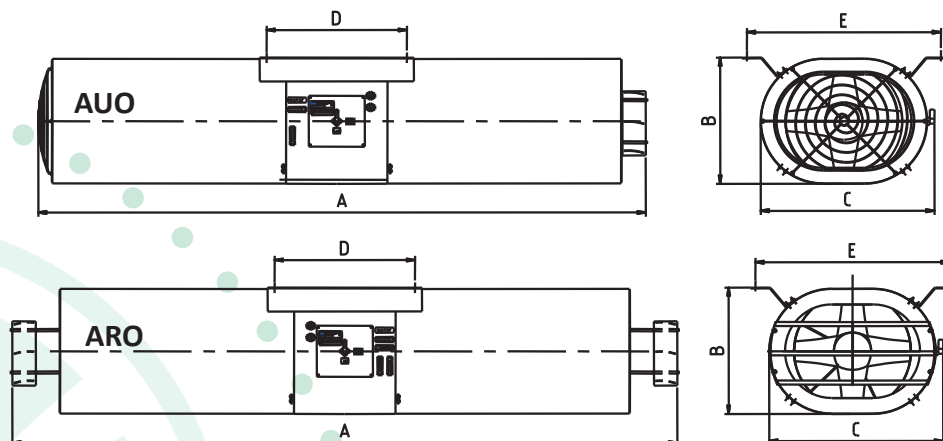

DIMENSIONS	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
AUO 500	2.606	540	760	600	830
ARO 500	2.854	540	760	600	830

Data subject to change